

DEL-218

Product Description

The DEL Series Subwoofer loudspeaker utilises high power low frequency drivers with a structurally solid enclosure. The DEL series subwoofer loudspeaker delivers extended low frequency bandwidth with excellence punch. Suitable for performing Arts, Auditoriums, Clubs, Houses of Worship, Entertainment Venues and indoor Sports Facilities. Excellent for live, rental and portable sound reinforcement applications.

Applications

Houses of Worship, Rehearsal Halls, Events, Clubs, Ballrooms

Features


- High SPL & Sensitivity
- High power low frequency transducer
- Powder coated grill
- Passive configuration
- Cabinet designed for FOH use

Specifications

Rated Power	2000W (RMS)
Construction	18 mm multilayered plywood
LF Driver	2 × 18", 4"VC, Ferrite Magnet
Frequency Response (-3dB)	30 Hz - 300 Hz
Maximum Peak Output	138 dB
Rated Impedance	4Ω
Dispersion (H × V)	Omni
Connector	2 × NL4R Speakon
Packaging Dimensions (L×B×H)(cms)	80 × 70 × 117
Net Weight	77 kgs
Gross Weight	84 kgs



Frequency Response

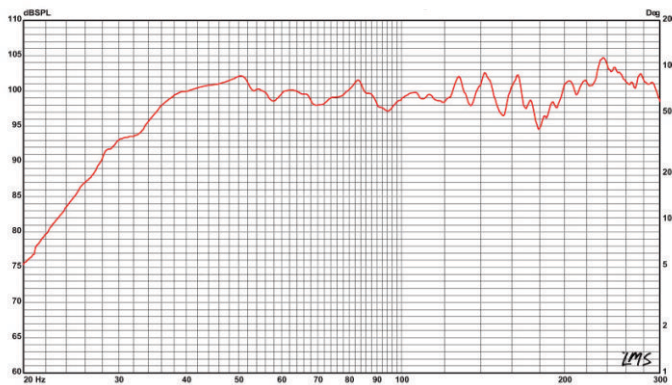

Dimensions

